

## 1080P 2.1Megapixels Vandal proof Mini Dome Network Camera



### Features

- 1/2.8" 2.1 Megapixels Supper Low Light Progressive Scan Sony CMOS
- H.264 High Profile & MJPEG dual-stream encoding
- Max 25/30fps@1080P (1920x1080)
- Digital WDR (>100db), 2D, 3D noise reduction, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS, Smart phone.
- Fixed lens 2.8mm, 3.6mm, 6mm are optional
- Manual Pan rotation 90°, Manual Tilt rotation 90°
- Support image rotation 90° or 270°
- POE optional
- Micro SD Card Slot
- BNC Video Output (for installation)

**Specification**


<b>Model</b>	<b>IP66</b>	<b>POE</b>	<b>LENS</b> (2.6mm,4.2mm optional)
<b>NR-8076-IPC21F</b>	Yes	No	Fixed Lens included,
<b>NR-8076-IPC21F-POE</b>	Yes	Yes	Fixed Lens included,
<b>Camera</b>			
Image Sensor	1/2.8" 2.1megapixels Progressive Scan Sony CMOS		
CPU	Hi3516C 500MHZ		
Effective Pixels	1920x1080		
Scanning System	Progressive		
Electronics Shutter Speed	Auto (1/25,1/30 ~ 1/10000s)		
Min. Illumination	0.05Lux/F1.2 (Color), 0.005Lux/F1.2(B/W); 0Lux/F1.2 (IR on)		
S/N Ratio	>50dB		
<b>Camera Features</b>			
Backlight Compensation	BLC / HLC / WDR (digital)		
White Balance	Auto		
Gain Control	Auto		
Noise Reduction	2D, 3D		
Privacy Masking	Up to 4 Areas		
<b>Lens</b>			
Focal Length	2.8mm, 3.6mm, 6mm optional		
Max Aperture	F1.4		
Focus Control	Manual		
Angle of View	97°~ 67°		
Lens Type	Fixed Iris		
Mount Type	Board-in Type		
<b>Video</b>			
Compression	H.264 Main Profile, Baseline / MJPEG		
Resolution	1920x1080, 1280x720 ; 960x528, 640x352, 480x256		
Frame Rate	Preferred Stream	1920x1080(1~25/30fps), 1280x720 (1~25/30fps)	
	Alternate Stream	960x528, 640x352, 480x256 (1~25/30fps)	
Bit Rate	32KB ~16Mbps, support VBR, CBR		
<b>Network</b>			
Ethernet	RJ-45 (10/100Base-T)		
Protocol	IPv4/IPv6, HTTP, TCP/IP, UDP, RTP, RTCP, UPNP, RTSP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP,		
ONVIF	ONVIF Ver. 2.0		
Max. User Access	5 users		
Smart Phone	iPhone, iPad, Android, Symbian		
<b>Auxiliary Interface</b>			
Memory Slot	Micro SD, Max 64GB		
<b>General</b>			
Power Supply	DC12V, POE (802.3af)		
Power Consumption	≤ 2W		
Working Environment	-20 °C ~ 60°C		
Dimensions	Φ107mm ×53.4mm		

Model: NR-8076-IPC21F


Weight

0.5KG

**Dimensions (mm)**

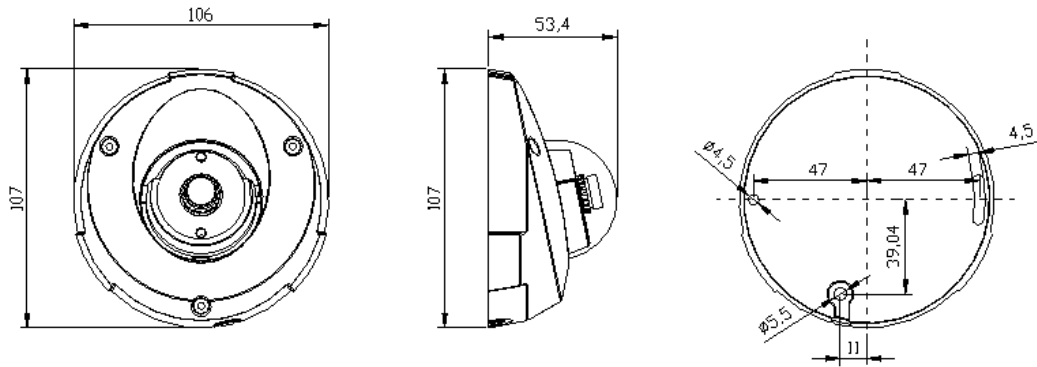

**Interfaces :**

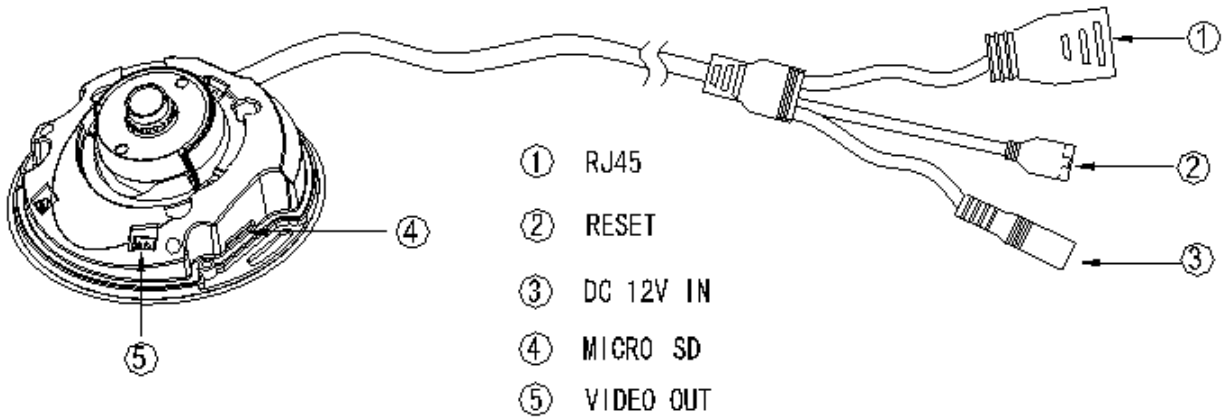

**Installation:**

