



Model: NR-8067-IPC30 Series

3.0 Megapixels IR Box Network Camera



Features

- 1/2.5" 3.0 Megapixels Progressive Scan Aptina CMOS.
- H.264 & MJPEG dual-stream encoding.
- Max 20fps@2048x1536, 25/30fps@1080P (1920x1080).
- Digital WDR (>80db), 2D, 3D noise reduction, AWB, AGC, BLC.
- To switch Day/Night by video detection or time or IR detection.
- Micro SD Card Slot (max 64GB).
- Two big LED lights, IR distance about 15-20 meters.
- IP66.
- POE optional.
- 3.0-10.5mm varifocal lens.
- Support ONVIF 2.4.



Model: NR-8067-IPC30 Series

Specification


| Model | IR | Audio | IP66 | POE | LENS (3.0-10.5mm) |
|-----------------------------|------------------|--|------|-----|--------------------------|
| NR-8067-IPC30 | Yes | No | Yes | No | 3.0-10.5mm Lens included |
| NR-8067-IPC30-POE | Yes | No | Yes | Yes | 3.0-10.5mm Lens included |
| NR-8067-IPC30-AA | Yes | Yes | Yes | No | 3.0-10.5mm Lens included |
| NR-8067-IPC30-AA-POE | Yes | Yes | Yes | Yes | 3.0-10.5mm Lens included |
| Camera | | | | | |
| Image Sensor | | 1/2.5" 3.0 megapixels Progressive Scan Aptina CMOS | | | |
| Effective Pixels | | 2048x1536 | | | |
| Scanning System | | Progressive | | | |
| Electronics Shutter Speed | | Auto (1/25,1/30 ~ 1/10000s) | | | |
| Min. Illumination | | 1Lux/F1.2 (Color), 0.1Lux/F1.2(B/W); 0Lux/F1.2 (IR on) | | | |
| S/N Ratio | | >50dB | | | |
| Camera Features | | | | | |
| Max. IR LEDs Length | | 15-20 m | | | |
| Day/Night Switch | | Auto Color to B/W | | | |
| Backlight Compensation | | BLC / HLC / WDR (digital) | | | |
| White Balance | | Auto | | | |
| Gain Control | | Auto | | | |
| Noise Reduction | | 2D, 3D | | | |
| Privacy Masking | | Up to 4 Areas | | | |
| Lens | | | | | |
| Focal Length | | 3.0-10.5mm varifocal lens | | | |
| Max Aperture | | F1.4 | | | |
| Focus Control | | Manual | | | |
| Angle of View | | 92°~ 20° | | | |
| Lens Type | | Manual Iris | | | |
| Mount Type | | Board-in Type | | | |
| Video | | | | | |
| Compression | | H.264 High Profile, Main Profile, Baseline / MJPEG | | | |
| Resolution | | 2048x1536 ; 1920x1080, 640x352, 320x240 | | | |
| Frame Rate | Preferred Stream | 2048x1536 (1~20fps), 1920x1080 (1~25/30fps), | | | |
| | Alternate Stream | 640x352, 320x240 (1~25/30fps) | | | |
| Bit Rate | | 32KB ~16Mbps, support VBR, CBR | | | |
| Network | | | | | |
| Ethernet | | RJ-45 (10/100Base-T) | | | |
| Protocol | | IPv4/IPv6, HTTP, TCP/IP, UDP, RTP, RTCP, UPNP, RTSP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, | | | |
| ONVIF | | ONVIF Ver. 2.4 | | | |
| Max. User Access | | 5 users | | | |
| Smart Phone | | iPhone, iPad, Android, Symbian | | | |
| Auxiliary Interface | | | | | |



Model: NR-8067-IPC30 Series

| | |
|---------------------|-------------------------------------|
| Memory Slot | Micro SD, Max 64GB |
| General | |
| Power Supply | DC12V, POE (802.3af) model with POE |
| Power Consumption | ≤8W |
| Working Environment | -20 °C ~ 60°C |
| Ingress Protection | IP66, |
| Dimensions | 270.2mm ×107.4 mm ×148 mm |
| Weight | 1.2KG |

Dimensions (mm)

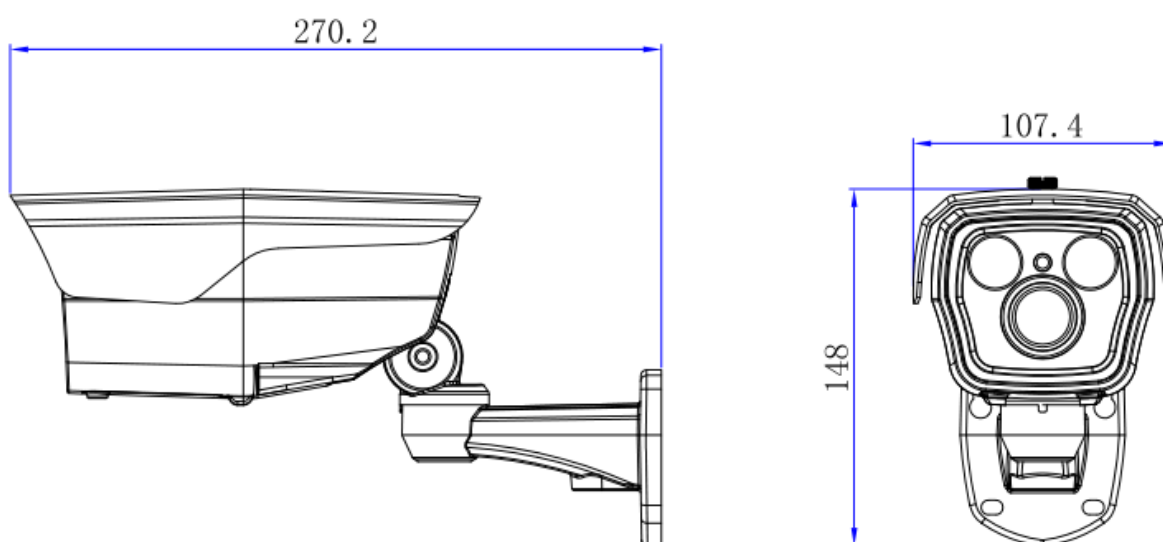

Interfaces :

